


**ROTARY TABLE**

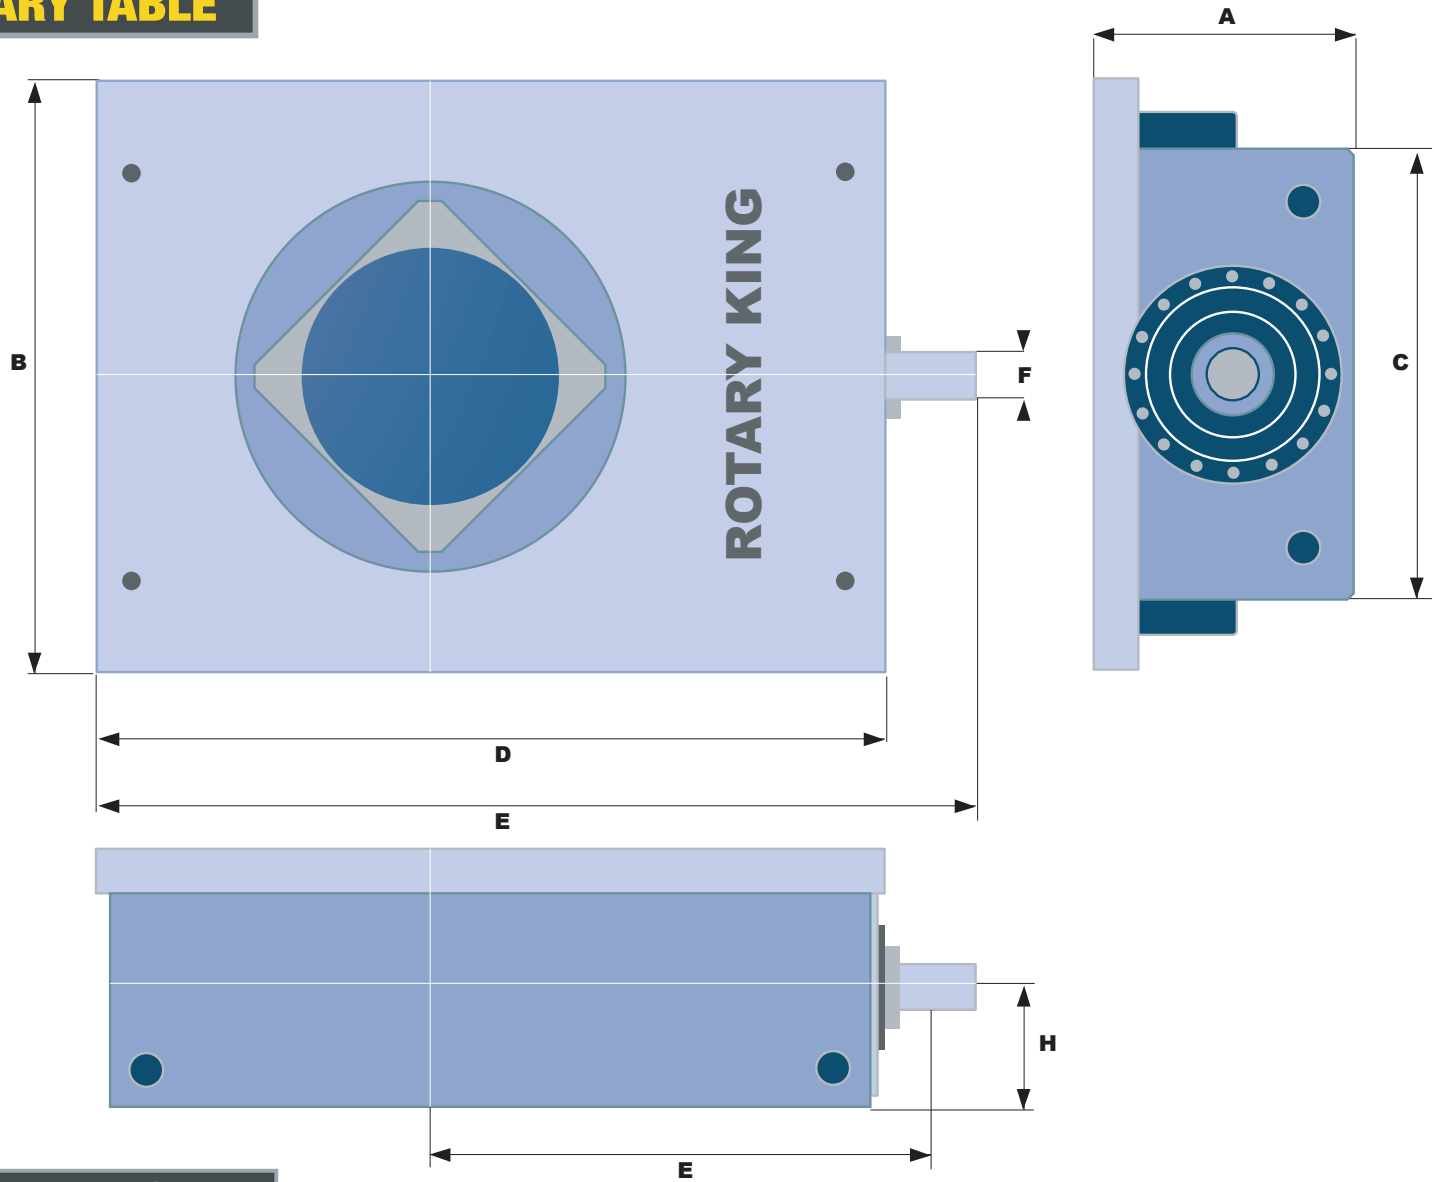

**ROTARY TABLE MODEL #**

	RK-12	RK-175S	RK-175	RK-205	RK-275	RK-375	RK-495
STATIC LOAD CAPACITY TONS (TONNES)	135 (122)	300 (272)	300 (272)	350 (318)	500 (454)	650 (590)	800 (726)
MAXIMUM RECOMMENDED TABLE SPEED RPM	500	500	500	500	500	650	800
MAXIMUM TABLE OPENING DIAMETER IN (MM)	11 1/2 (292)	17 1/2 (445)	17 1/2 (445)	20 1/2 (521)	27 1/2 (699)	37 1/2 (953)	49 1/2 (1257)
GEAR RATIO	3.50: 1	3.78: 1	3.78: 1	3.79: 1	3.16: 1	3.60: 1	3.93: 1
(LITERS)	3 (11)	4 (15)	4 (15)	4.5 (17)	8.5 (32)	12 (46)	15 (57)
A IN (MM)	14 5/8 (371)	20 5/8 (523)	20 5/8 (523)	22 (559)	27 1/2 (705)	28 (711)	32 1/4 (819)
B IN (MM)	35 (889)	48 (1219)	48 (1219)	54 (1377)	63 (1600)	71 (1797)	86 (2184)
C IN (MM)	35 (889)	38 (956)	38 (956)	44 (1123)	48 (1219)	57 (1442)	63 (1600)
D IN (MM)	44 3/8 (1127)	61 1/2 (1689)	68 1/8 (1755)	44 1/4 (1612)	81 (2057)	83 (2108)	102 (2590)
E IN (MM)	57 3/8 (1457)	76 (1930)	85 1/4 (1480)	79 1/2 (2020)	93 3/4 (2381)	95 3/4 (2432)	115 3/4 (2940)
F IN (MM)	4 1/4 (108)	4 1/4 (108)	4 1/4 (108)	4 1/2 (114)	4 15/16 (125)	4 15/16 (125)	4 15/16 (125)
G IN (MM)	36 (914)	44 (1117)	53 1/4 (1352)	44 (1117)	53 1/4 (1352)	53 1/4 (1352)	65 (1651)
H IN (MM)	6 1/16 (154)	10 (254)	10 (254)	11 (280)	13 (330)	13 (330)	14 1/2 (368)
WEIGHT LESS MASTER BUSING LBS (KG)	2300 (1043)	5970 (2707)	6130 (2780)	7325 (3322)	11700 (5306)	14800 (6712)	25800 (11700)