


TYPE - B BLOCK

TRAVELING BLOCK WITH CLEVIS

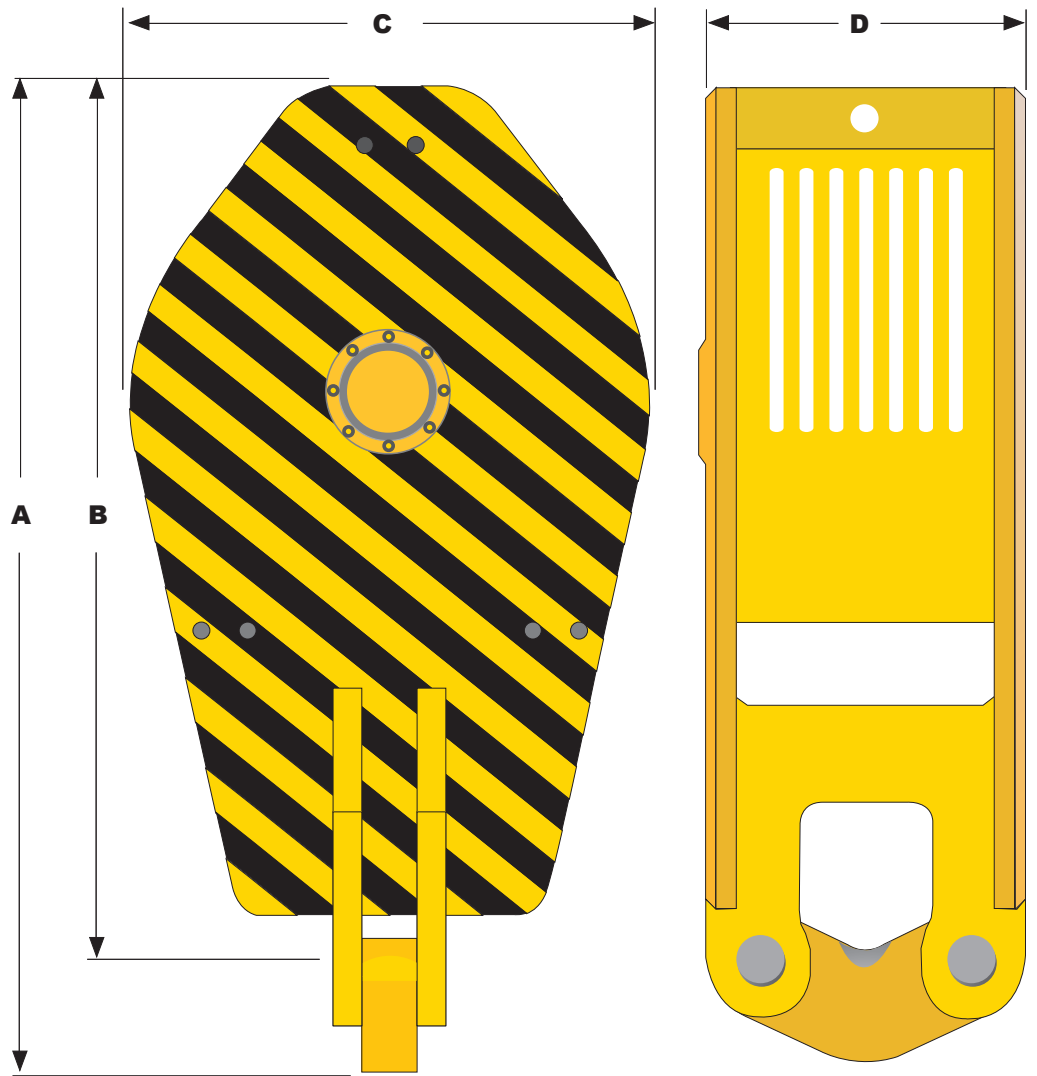

DIMENSIONAL CHART

| MODEL | API WORKING LOAD TONS | SHEAVE SIZE INCHES | NUMBER OF SHEAVES | RECOMMENDED WIRE ROPE SIZE - INCHES | DIMENSIONS | | | | ESTIMATED WEIGHT (LBS. / KG.) |
|----------|-----------------------|--------------------|-------------------|-------------------------------------|--------------------|--------------------|---------------|-------------------|-------------------------------|
| | | | | | A (in. / mm.) | B (in. / mm.) | C (in. / mm.) | D (in. / mm.) | |
| B24D110 | 110 | 24 | 4 | 1 | 42 / 1077 | 39 / 990 | 26.5 / 673 | 18 1/2 / 470 | 3500 / 1585 |
| B36D150 | 150 | 36 | 4 | 1 - 1 1/8 | 58 3/4 / 1492 1/4 | 50 3/8 / 1278 5/8 | 39 / 990 1/2 | 20 / 508 | 4200 / 1916 1/2 |
| B36E250 | 250 | 36 | 5 | 1 1/8 - 1 1/4 | 71 3/8 / 1813 | 62 3/8 / 1584 3/8 | 39 / 990 1/2 | 24 3/4 / 628 5/8 | 5400 / 2464 |
| B42E350 | 350 | 42 | 5 | 1 1/8 - 1 1/4 | 83 1/2 / 2121 | 72 1/2 / 1841 1/2 | 45 / 1143 | 27 3/4 / 704 7/8 | 8400 / 3833 |
| B44E350 | 350 | 44 | 5 | 1 1/8 - 1 1/4 | 84 1/2 / 2146 3/8 | 74 1/2 / 1892 3/8 | 47 / 1193 7/8 | 27 3/4 / 704 7/8 | 8600 / 3924 1/4 |
| B42E350 | 350 | 42 | 6 | 1 1/8 - 1 1/4 | 83 1/2 / 2121 | 72 1/2 / 1841 1/2 | 45 / 1143 | 31 1/2 / 800 | 9000 / 4106 6/8 |
| B50F400 | 400 | 50 | 6 | 1 1/4 - 1 3/8 | 86 1/2 / 2197 | 75 1/2 / 1917 3/4 | 53 / 1346 1/4 | 31 1/2 / 800 | 12000 / 5475 1/2 |
| B50F500 | 500 | 50 | 6 | 1 3/8 - 1 1/2 | 95 / 2413 | 83 1/4 / 2114 1/2 | 53 / 1346 1/4 | 33 / 838 1/4 | 18000 / 8213 1/2 |
| B52F500 | 500 | 52 | 6 | 1 3/8 - 1 1/2 | 97 / 2463 7/8 | 85 1/4 / 2165 3/8 | 55 / 1397 | 33 / 838 1/4 | 18500 / 8441 1/2 |
| B60F500 | 500 | 60 | 6 | 1 3/8 - 1 1/2 | 105 / 2667 | 93 1/4 / 2368 1/2 | 63 / 1600 1/4 | 33 / 838 1/4 | 19200 / 8761 |
| B60G500 | 500 | 60 | 7 | 1 3/8 - 1 1/2 | 105 / 2667 | 93 1/4 / 2368 1/2 | 63 / 1600 1/4 | 37 / 939 7/8 | 21000 / 9582 3/8 |
| B60F650 | 650 | 60 | 6 | 1 1/2 - 1 5/8 | 117 3/4 / 2990 7/8 | 104 1/4 / 2648 | 63 / 1600 1/4 | 34 1/4 / 870 | 20300 / 9262 7/8 |
| B60G650 | 650 | 60 | 7 | 1 1/2 - 1 5/8 | 117 3/4 / 2990 7/8 | 104 1/4 / 2648 | 63 / 1600 1/4 | 38 1/2 / 978 | 21500 / 9810 1/2 |
| B60G750 | 750 | 60 | 7 | 1 1/2 - 1 5/8 | 126 / 3200 3/8 | 107 1/2 / 2730 1/2 | 63 / 1600 1/4 | 39 1/2 / 1003 1/4 | 25650 / 11704 |
| B68G750 | 750 | 68 | 7 | 1 1/2 - 1 5/8 | 132 3/4 / 3371 7/8 | 114 1/4 / 2902 | 71 / 1803 3/8 | 39 1/2 / 1003 1/4 | 31000 / 14145 3/8 |
| B60H750 | 750 | 60 | 8 | 1 1/2 - 1 5/8 | 126 / 3200 3/8 | 107 1/2 / 2730 1/2 | 63 / 1600 1/4 | 43 3/8 / 1111 1/4 | 27000 / 12320 |
| B68H750 | 750 | 68 | 8 | 1 1/2 - 1 5/8 | 132 3/4 / 3371 7/8 | 114 1/4 / 2902 | 71 / 1803 3/8 | 43 3/8 / 1111 1/4 | 32500 / 14829 3/4 |
| B60H875 | 875 | 60 | 8 | 1 5/8 - 1 3/4 | 133 / 3378 1/4 | 112 / 2844 7/8 | 63 / 1600 1/4 | 43 / 1092 | 31500 / 14373 1/2 |
| B60H1000 | 1000 | 60 | 8 | 1 3/4 - 2 | 138 / 3505 1/4 | 114 1/2 / 2908 3/8 | 63 / 1600 1/4 | 52 / 1320 7/8 | 36000 / 16426 7/8 |
| B72H1000 | 1000 | 72 | 8 | 1 3/4 - 2 | 147 / 3733 7/8 | 123 1/2 / 3137 | 75 / 1905 | 52 / 1320 7/8 | 45000 / 20533 1/2 |
| B78G1000 | 1000 | 78 | 7 | 1 3/4 - 2 | 152 / 3860 7/8 | 128 1/2 / 3264 | 81 / 2057 3/8 | 46 3/8 / 1187 1/2 | 44500 / 20305 3/8 |
| B72H1200 | 1200 | 72 | 8 | 1 3/4 - 2 | 154 / 3911 5/8 | 129 / 3276 5/8 | 75 / 1905 | 52 / 1320 7/8 | 48000 / 21902 1/2 |