


TYPE - D BLOCK

HOOK BLOCK WITH
SPRING & SWIVEL

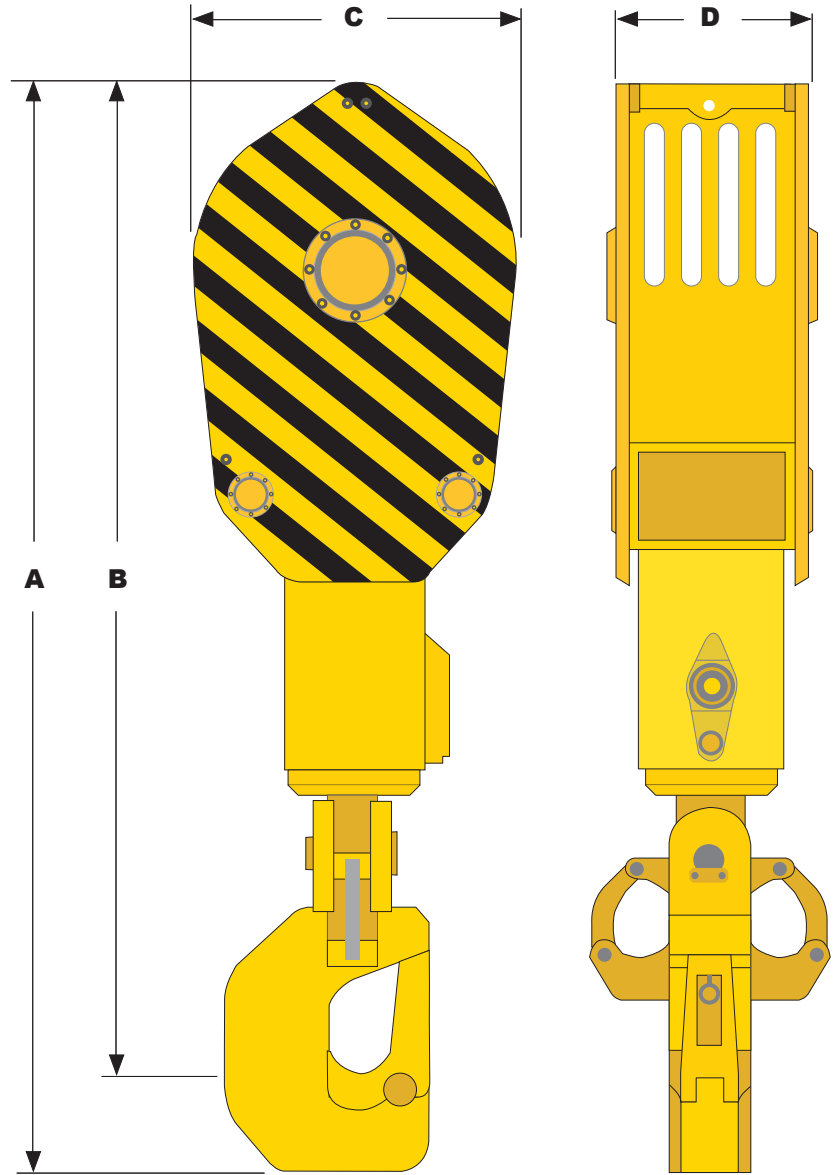

DIMENSIONAL CHART

MODEL	API WORKING LOAD TONS	SHEAVE SIZE INCHES	NUMBER OF SHEAVES	RECOMMENDED WIRE ROPE SIZE - INCHES	DIMENSIONS				ESTIMATED WEIGHT (LBS. / KG.)
					A (in. / mm.)	B (in. / mm.)	C (in. / mm.)	D (in. / mm.)	
D24C75	75	24	3	3/4 - 7/8	87 / 2210	83 / 2108	33 / 838	15 1/2 / 394	3100 / 1406
D24C110	110	24	3	1 - 1 1/8	78 / 1981	70 5/8 / 1794	26 1/2 / 673	15 1/2 / 394	3230 / 1465
D30C110	110	30	3	1 - 1 1/8	84 / 2134	76 5/8 / 1946	33 / 838	15 1/2 / 394	3300 / 1497
D30C160	160	30	3	1 - 1 1/8	113 / 2870	102 / 2591	33 / 838	20 / 508	6800 / 3084
D36C160	160	36	3	1 - 1 1/8	117 / 2972	106 / 2692	39 / 991	20 / 508	6900 / 3130
D30D160	160	30	4	1 - 1 1/8	113 / 2870	102 / 2591	33 / 838	20 / 508	6900 / 3130
D36D160	160	36	4	1 - 1 1/8	117 / 2972	106 / 2692	39 / 991	20 / 508	7000 / 3175
D30D175	175	30	4	1 - 1 1/4	113 / 2870	102 / 2591	33 / 838	20 / 508	6900 / 3130
D30E175	175	30	5	1 - 1 1/4	113 / 2870	102 / 2591	33 / 838	23 3/4 / 603	7100 / 3221
D30E200	200	30	5	1 - 1 1/4	120 1/4 / 3054	106 / 2692	33 / 838	24 3/4 / 629	10000 / 4536
D36E200	200	36	5	1 - 1 1/4	126 1/4 / 3207	112 / 2845	39 / 991	24 3/4 / 629	11600 / 5262
D36D265	265	36	4	1 - 1 1/4	126 1/4 / 3207	112 / 2845	39 / 991	24 3/4 / 629	11000 / 4990
D36E265	265	36	5	1 - 1 1/4	126 1/4 / 3207	112 / 2845	39 / 991	24 3/4 / 629	11500 / 5216
D42D265	265	42	4	1 - 1 1/4	132 1/4 / 3359	118 / 2997	45 / 1143	24 3/4 / 629	12200 / 5534
D42E265	265	42	5	1 - 1 1/4	132 1/4 / 3359	118 / 2997	45 / 1143	24 3/4 / 629	12700 / 5761
D42E360	360	42	5	1 1/4 - 1 3/8	157 / 3988	141 / 3581	45 / 1143	29 1/2 / 749	15500 / 7031
D50E360	360	50	5	1 1/4 - 1 3/8	165 / 4191	165 / 4191	53 / 1346	29 1/2 / 749	15900 / 7212
D50F525	525	50	6	1 3/8 - 1 5/8	173 / 4394	155 1/4 / 3943	53 / 1346	32 / 813	22000 / 9979
D60F525	525	60	6	1 3/8 - 1 5/8	183 / 4648	165 1/4 / 4197	63 / 1600	32 / 813	23100 / 10478